


CUSTOMER'S MODEL NO.:


CUSTOMER APPROVED:

DATE:

Pin	Pin Description
<b>J1</b>	
1	LED+
2	VDD
3	VSS
4	SDA
5	SCL
6	NC

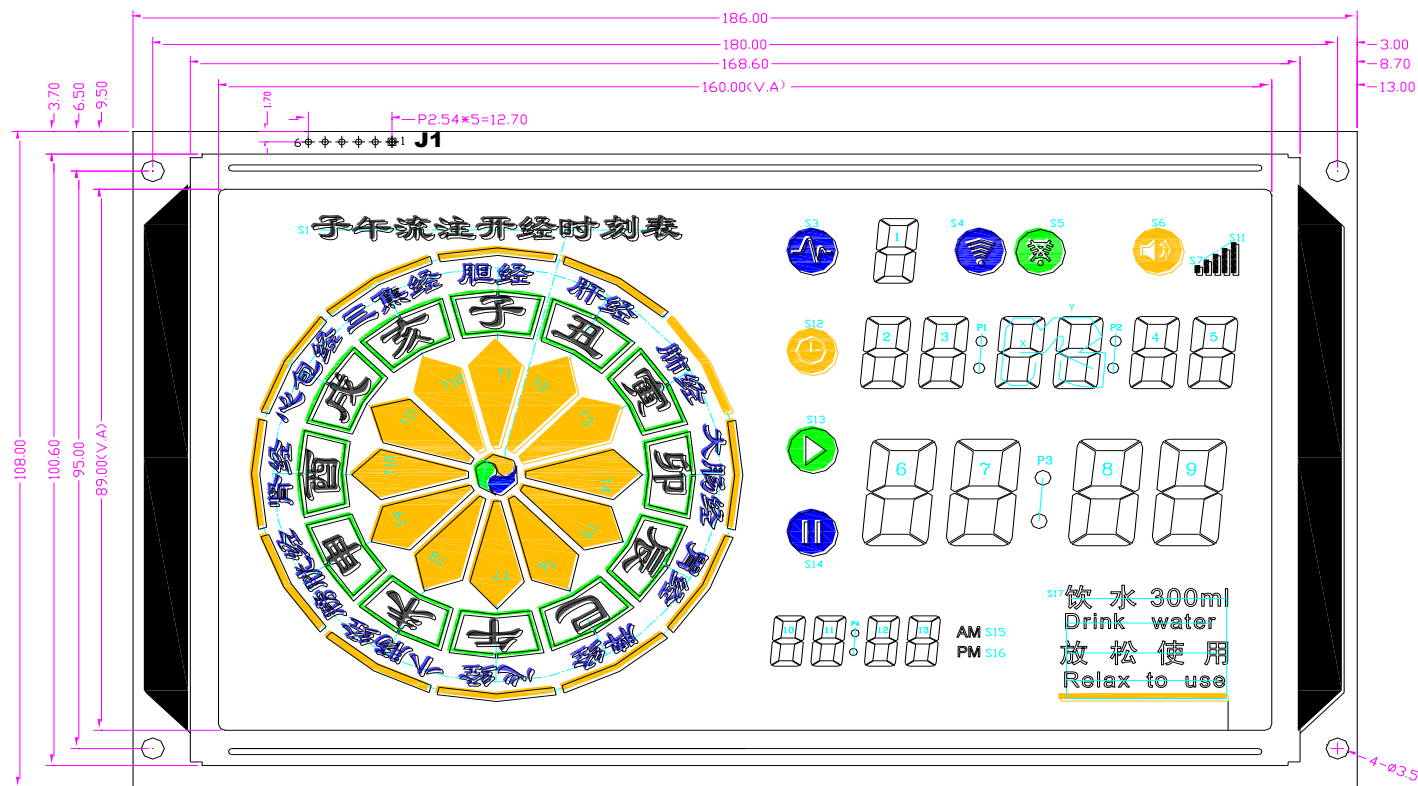

客供插座

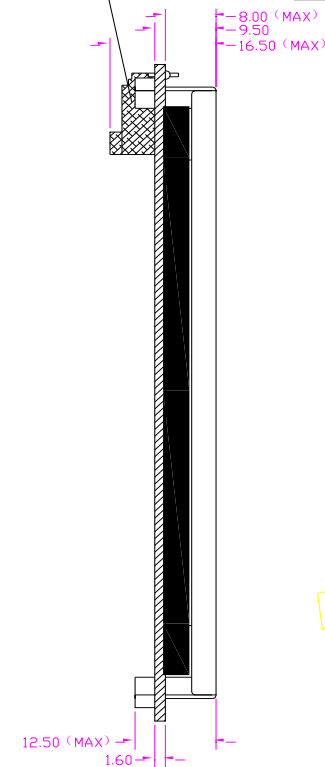

VER	REVISION RECORD	DATE
1.0	初版发行	2014.05.12
1.1	将横向定位孔尺寸拓展为180.00	2014.07.24
1.2	应客户要求将Use pine release改为Relax to use	2015.02.03

LCM SPECIFICATION	
DISPLAY TYPE: VATN NEGATIVE	LCD DRIVER: I2C
LCD COLOR MODE: BLACK	BACK LIGHT: WHITE (IF=300~400mA)
DRIVING METNOD : 1/4DUTY,1/4 BIAS	OPERATING TEMP: -0°C~+50°C
OPERATING VOLTAGE: 5V	STORAGE TEMP: -10°C~+60°C
VIEWING DIRECTIVE: 6:00	未注公差: ±0.3

北京集粹电子设备制造有限公司 BEIJING ELITE EEM CO.LTD	
TITLE: LCM外形尺寸图	VER: 1.2
FILE NAME: CD1401TKD-SWN	SCALE:1:1
DRAWING NO.: SCH-RD-PART-14002-LCM-001	UNIT: mm
DRAWN: ?? 2015.02.03	APPROVED:
CHECKED:	DATE:
	PAGE: 1/1